
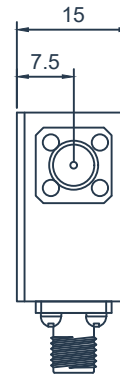


1		2		3		4	
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date		
	0	Keith W					

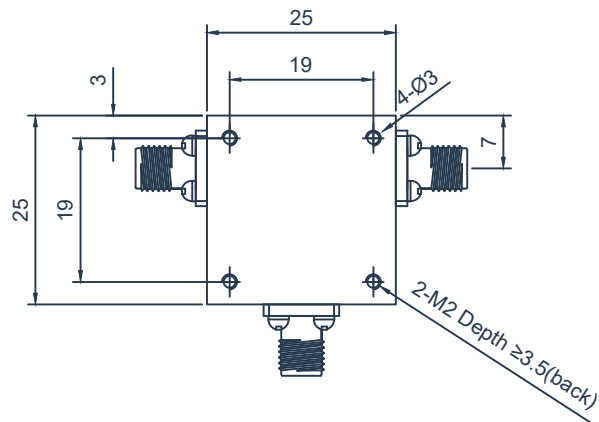

SPECIFICATIONS

Part's Number	HCCTA30T60G-B
Frequency(GHz)	3.0-6.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.6
Isolation(dB)MIN	16.0
VSWR MAX	1.35
Phase equalization($\pm^\circ$)	-
PK/CW (Watt)	100/100
Operating Temperature($^\circ\text{C}$)	-40~+70
Reverse Power(Watt)	-
Conector	SMA
Base plate plating	Thread Fastening
BW Max	FULL

Description:Coaxial Circulator

Description:Coaxial Isolator



Unit:mm

1:1

A4