


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0				

HzBeat

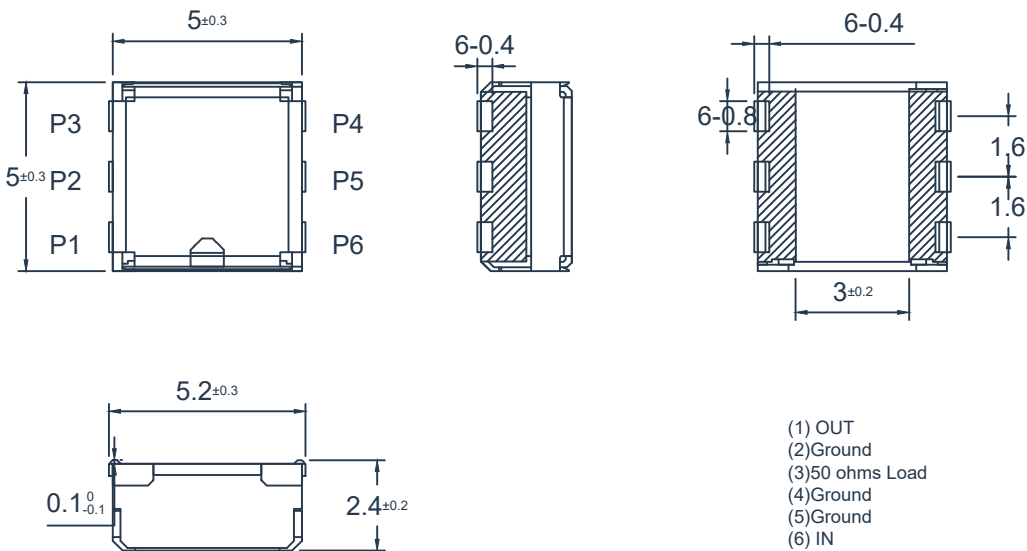

SPECIFICATIONS

Part's Number	HLCU2110T2170M
Frequency(GHz)	2.11-2.17
Insertion Loss(dB)MAX	0.6(-35~+85℃)
	0.65(+85~+115℃)
Isolation(dB)MIN	13.0(-35~+125℃)
VSWR MAX	1.58(-35~+125℃)
PK/CW (Watt)	10/2
Reverse Power (Max)	-
Operating Temperature(℃)	-40~+125
Conector	SMD
BW Max	FULL

Description:SMD Circulator

Hzbeat Electronic Technology Co. Ltd



Unit:mm

5:1

A4

Unless otherwise specified, the surface flatness is $\nabla 3.2$