


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0				

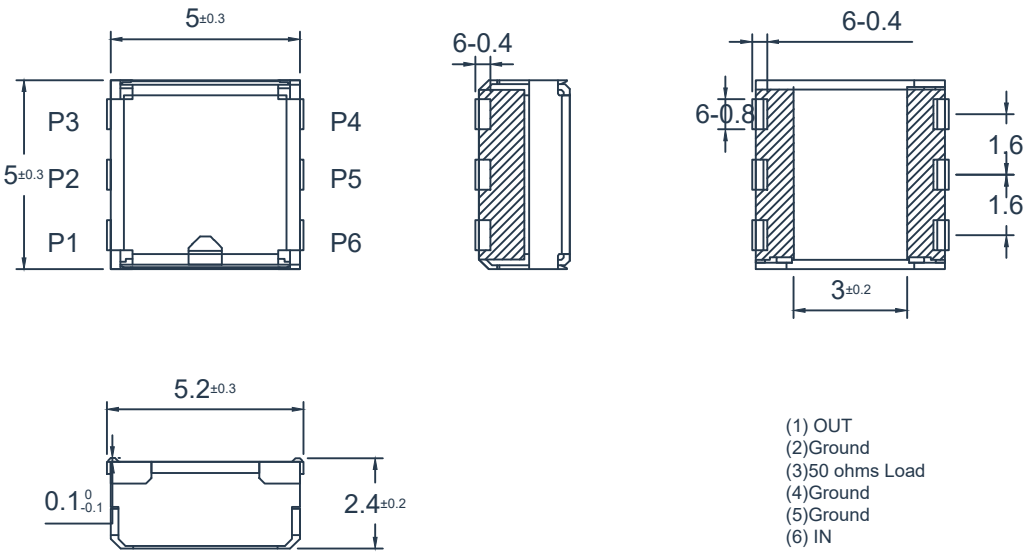

SPECIFICATIONS

Part's Number	HLCU2500T2700M
Frequency(GHz)	2.5-2.7
Insertion Loss(dB)MAX	1.3(-40~+125℃)
Isolation(dB)MIN	11.0(-40~+125℃)
VSWR MAX	1.78(-40~+125℃)
PK/CW (Watt)	10/2
Reverse Power (Max)	-
Operating Temperature(℃)	-40~+125
Conector	SMD
BW Max	FULL

Description:SMD Circulator

Hzbeat Electronic Technology Co. Ltd



Unit:mm

5:1

A4

Unless otherwise specified, the surface flatness is $\nabla 3.2$