

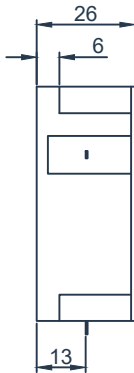
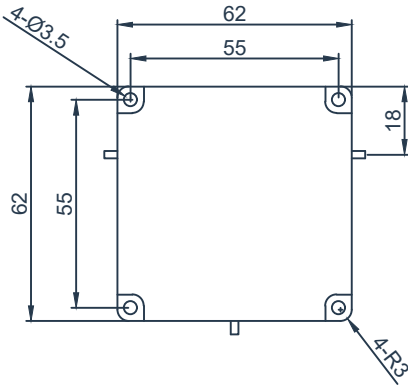


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

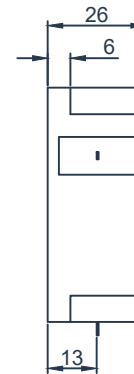

SPECIFICATIONS	
Part's Number	HDCTC150T400M
Frequency(GHz)	0.15-0.4
Direction	Clockwise
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
VSWR MAX	1.25
Phase equalization($\pm^\circ$)	-
PK/CW (Watt)	1000/100
Operating Temperature($^\circ\text{C}$)	-55~+85
Reverse Power(Watt)	-
Conector	TAB
Base plate plating	Flange installation
BW Max	20%
Description:Drop In Circulator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
1:2 A4	

1		2		3		4	
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date		
	0	Keith W					

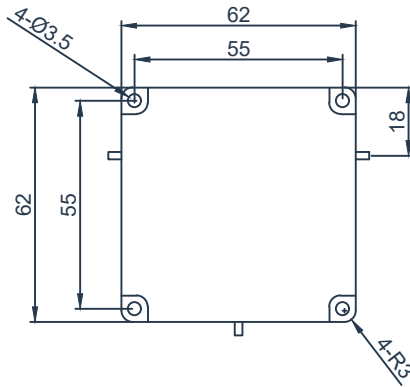

SPECIFICATIONS		
Part's Number	HDCTD150T400M	
Frequency(GHz)	0.15-0.4	
Direction	Counter Clockwise	
Insertion Loss(dB)MAX	0.4	
Isolation(dB)MIN	20.0	
VSWR MAX	1.25	
Phase equalization(±°)	-	
PK/CW (Watt)	1000/100	
Operating Temperature(°C)	-55~+85	
Reverse Power(Watt)	-	
Conector	TAB	
Base plate plating	Flange installation	
BW Max	20%	
Description:Drop In Circulator		
Hzbeat Electronic Technology Co. Ltd		1:2
	Unit:mm	A4