



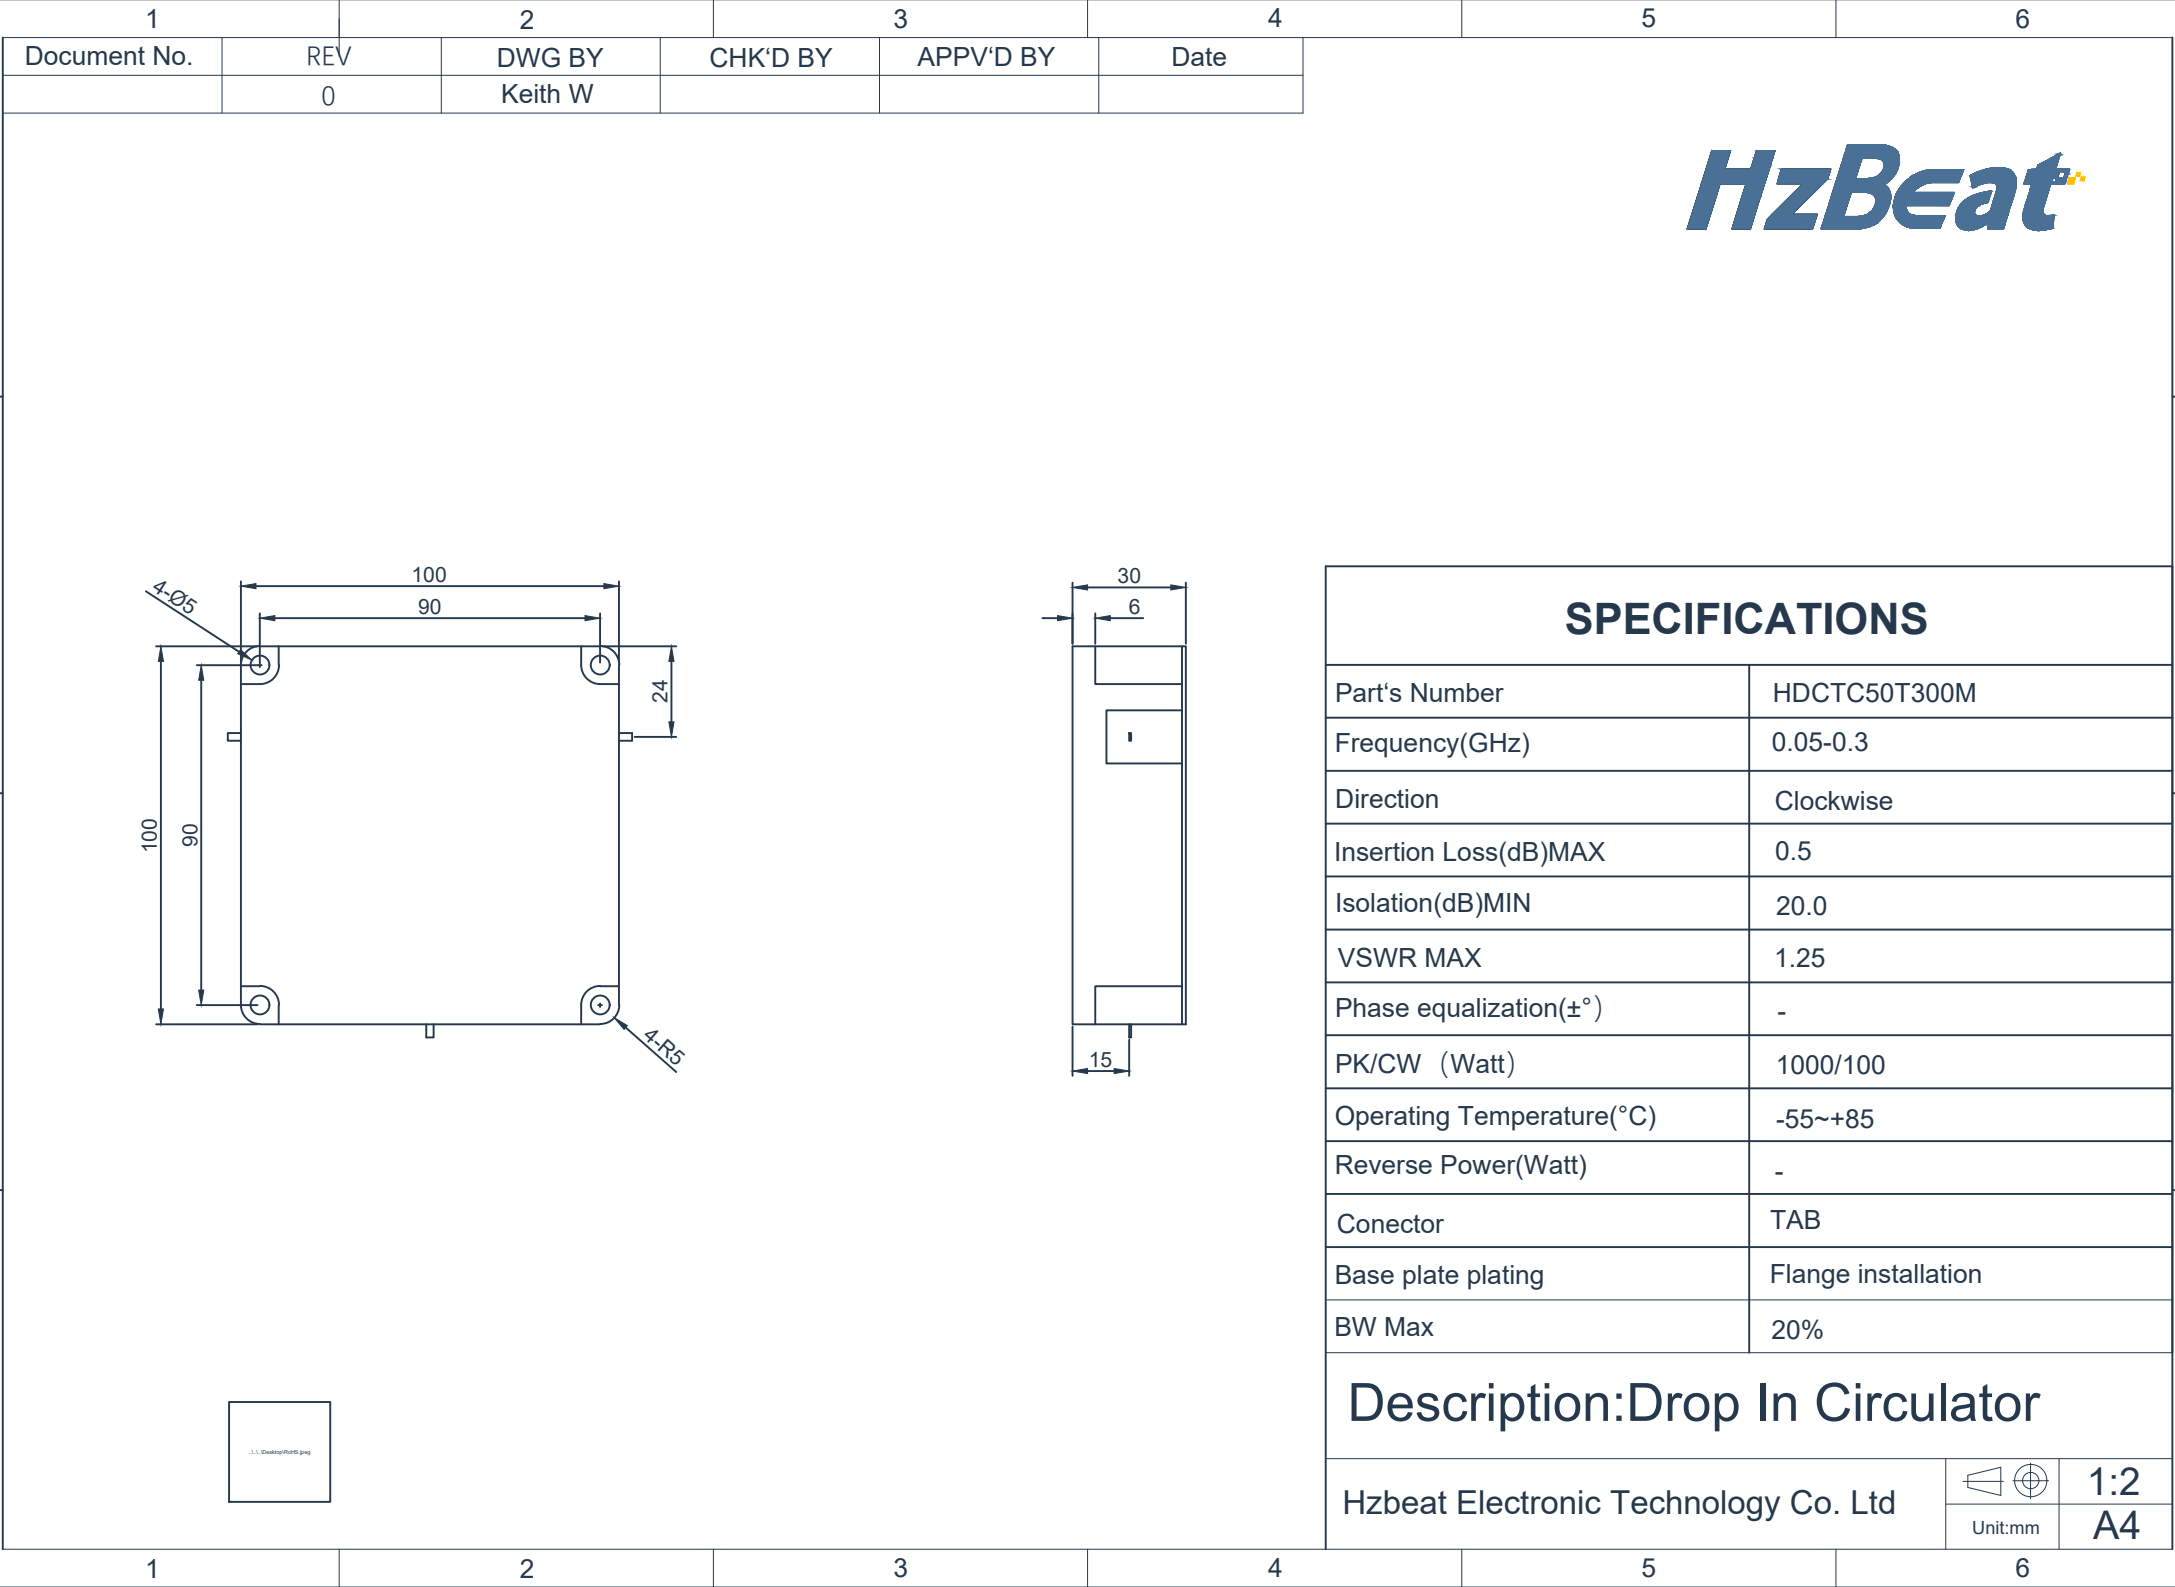

|              |     |         |          |           |      |
|--------------|-----|---------|----------|-----------|------|
| 1            | 2   | 3       | 4        | 5         | 6    |
| Document No. | REV | DWG BY  | CHK'D BY | APPV'D BY | Date |
|              | 0   | Keith W |          |           |      |

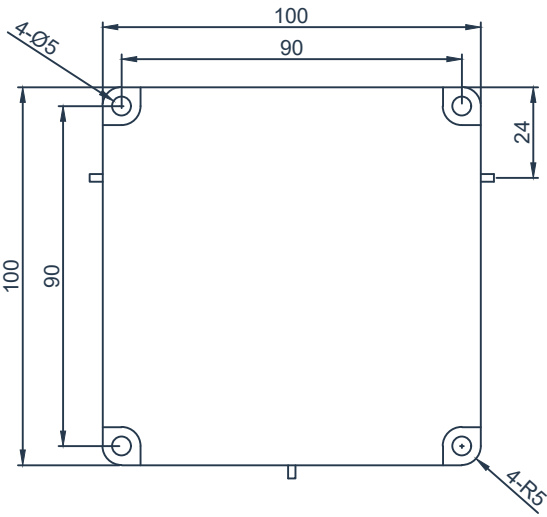

| SPECIFICATIONS                       |                     |
|--------------------------------------|---------------------|
| Part's Number                        | HDCTC50T300M        |
| Frequency(GHz)                       | 0.05-0.3            |
| Direction                            | Clockwise           |
| Insertion Loss(dB)MAX                | 0.4                 |
| Isolation(dB)MIN                     | 20.0                |
| VSWR MAX                             | 1.2                 |
| Phase equalization(±°)               | -                   |
| PK/CW (Watt)                         | 1000/100            |
| Operating Temperature(°C)            | -55~+85             |
| Reverse Power(Watt)                  | -                   |
| Conector                             | TAB                 |
| Base plate plating                   | Flange installation |
| BW Max                               | 10%                 |
| Description:Drop In Circulator       |                     |
| Hzbeat Electronic Technology Co. Ltd |                     |
| Unit:mm                              |                     |
| 1:2<br>A4                            |                     |