



HzBeat

SPECIFICATIONS	
Part's Number	HDCTC70T180G
Frequency(GHz)	7.0-18.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
VSWR MAX	1.25
Phase equalization($\pm^\circ$)	-
PK/CW (Watt)	200/20
Operating Temperature($^\circ\text{C}$)	-55~+85
Reverse Power(Watt)	-
Conector	TAB
Base plate plating	Nickel plating
BW Max	10%
Description:Drop In Circulator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
2:1 A4	

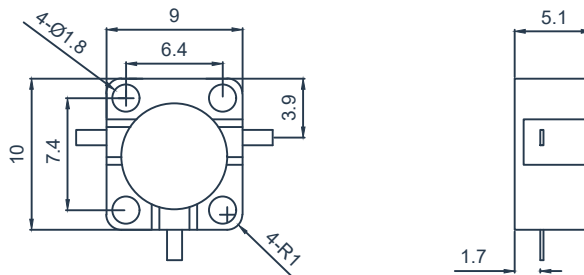

SPECIFICATIONS		
Part's Number	HDCTC70T180G	
Frequency(GHz)	7.0-18.0	
Direction	Clockwise	
Insertion Loss(dB)MAX	0.4	
Isolation(dB)MIN	20.0	
VSWR MAX	1.25	
Phase equalization(±°)	-	
PK/CW (Watt)	200/20	
Operating Temperature(°C)	-55~+85	
Reverse Power(Watt)	-	
Conector	TAB	
Base plate plating	Nickel plating	
BW Max	10%	
Description:Drop In Circulator		
Hzbeat Electronic Technology Co. Ltd		2:1
	Unit:mm	A4

1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

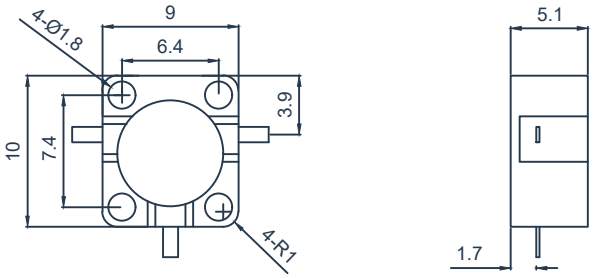

SPECIFICATIONS	
Part's Number	HDCTC70T180G
Frequency(GHz)	7.0-18.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	20.0
VSWR MAX	1.25
Phase equalization($\pm^\circ$)	-
PK/CW (Watt)	200/20
Operating Temperature($^\circ\text{C}$)	-55~+85
Reverse Power(Watt)	-
Conector	TAB
Base plate plating	Nickel plating
BW Max	5%
Description:Drop In Circulator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
2:1 A4	