



1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

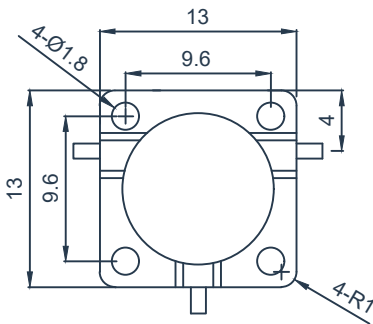

SPECIFICATIONS

Part's Number	HDCTD18T34G
Frequency(GHz)	1.8-3.4
Direction	Counter Clockwise
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
VSWR MAX	1.25
Phase equalization($\pm^\circ$)	-
PK/CW (Watt)	500/100
Operating Temperature($^\circ\text{C}$)	-55~+85
Reverse Power(Watt)	-
Conector	TAB
Base plate plating	Nickel plating
BW Max	10%

Description:Drop In Circulator

Hzbeat Electronic Technology Co. Ltd





Unit:mm

2:1

A4

1	2	3	4
Document No.	REV	DWG BY	CHK'D BY
	0	Keith W	
			APPV'D BY
			Date

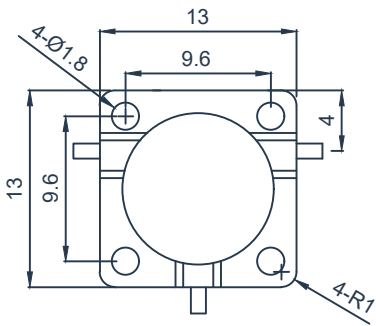

SPECIFICATIONS	
Part's Number	HDCTD18T34G
Frequency(GHz)	1.8-3.4
Direction	Counter Clockwise
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	20.0
VSWR MAX	1.2
Phase equalization(±°)	-
PK/CW (Watt)	500/100
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	TAB
Base plate plating	Nickel plating
BW Max	5%
Description:Drop In Circulator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
2:1 A4	