

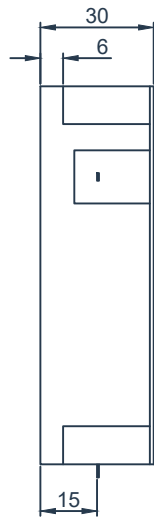


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

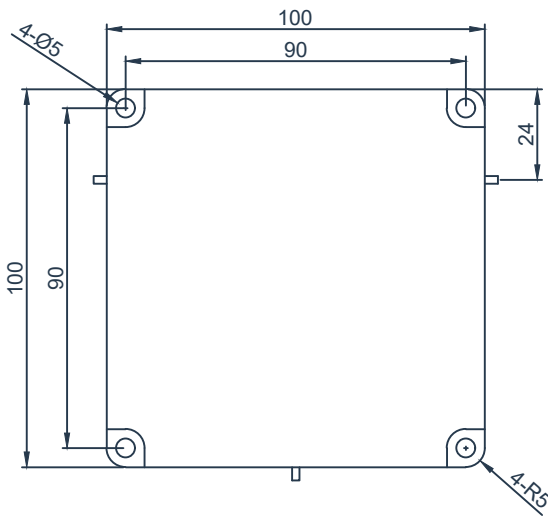

SPECIFICATIONS	
Part's Number	HDCTD50T300M
Frequency(GHz)	0.05-0.3
Direction	Counter Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20.0
VSWR MAX	1.25
Phase equalization(±°)	-
PK/CW (Watt)	1000/100
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	TAB
Base plate plating	Flange installation
BW Max	20%
Description:Drop In Circulator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
1:2 A4	

1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

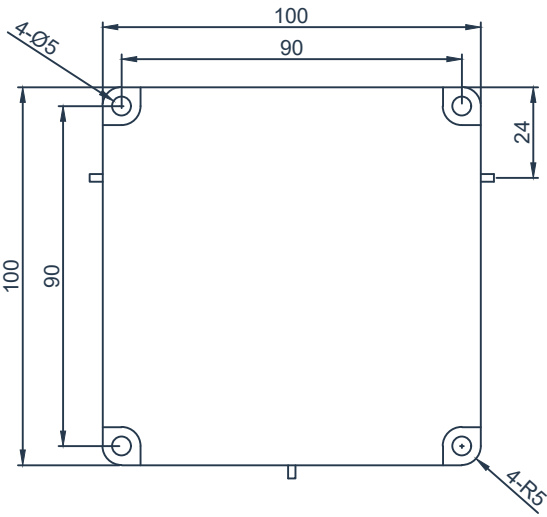

SPECIFICATIONS	
Part's Number	HDCTD50T300M
Frequency(GHz)	0.05-0.3
Direction	Counter Clockwise
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
VSWR MAX	1.2
Phase equalization(±°)	-
PK/CW (Watt)	1000/100
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	TAB
Base plate plating	Flange installation
BW Max	10%
Description:Drop In Circulator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
1:2 A4	