



1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

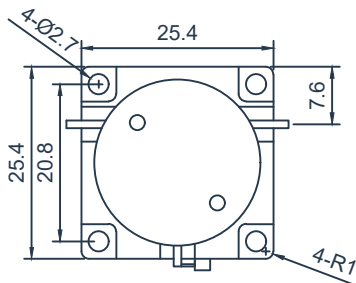

SPECIFICATIONS

Part's Number	HDITC20T60G-B
Frequency(GHz)	2.0-6.0
Direction	Clockwise
Insertion Loss(dB)MAX	1.0(1.2)
Isolation(dB)MIN	11.0(10.0)
VSWR MAX	1.7(1.8)
Phase equalization(±°)	-
PK/CW (Watt)	-/50
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	TAB
Base plate plating	Nickel plating
BW Max	FULL

Description:Drop In Isolator

Hzbeat Electronic Technology Co. Ltd




1:1

Unit:mm

A4

1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

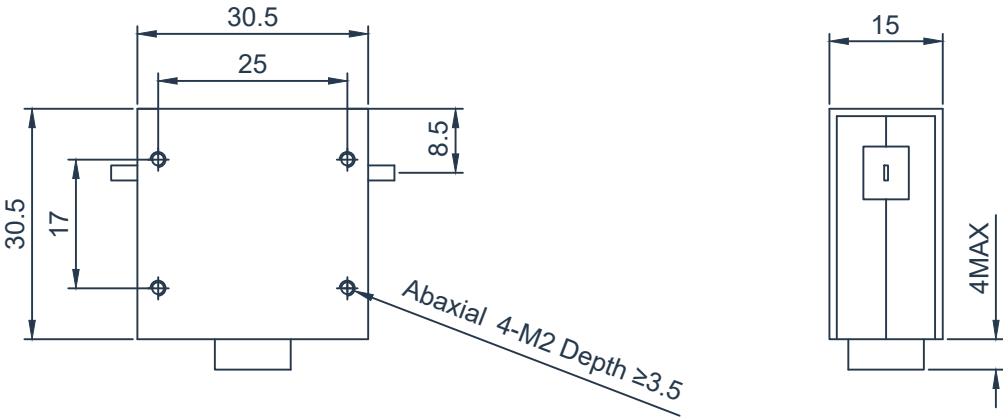

SPECIFICATIONS	
Part's Number	HDITC20T60G-B
Frequency(GHz)	2.0-6.0
Direction	Clockwise
Insertion Loss(dB)MAX	1.0
Isolation(dB)MIN	12.0
VSWR MAX	1.6
Phase equalization($\pm^\circ$)	-
PK/CW (Watt)	-/80
Operating Temperature($^\circ\text{C}$)	-55~+85
Reverse Power(Watt)	30
Conector	TAB
Base plate plating	Nickel plating
BW Max	FULL
Description:Drop In Isolator	
Hzbeat Electronic Technology Co. Ltd	
1:1 A4	
Unit:mm	