
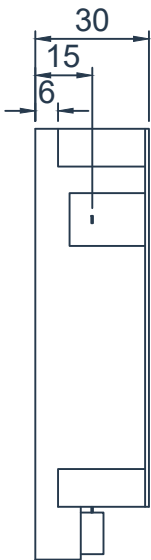


|              |     |         |          |           |      |
|--------------|-----|---------|----------|-----------|------|
| 1            | 2   | 3       | 4        | 5         | 6    |
| Document No. | REV | DWG BY  | CHK'D BY | APPV'D BY | Date |
|              | 0   | Keith W |          |           |      |

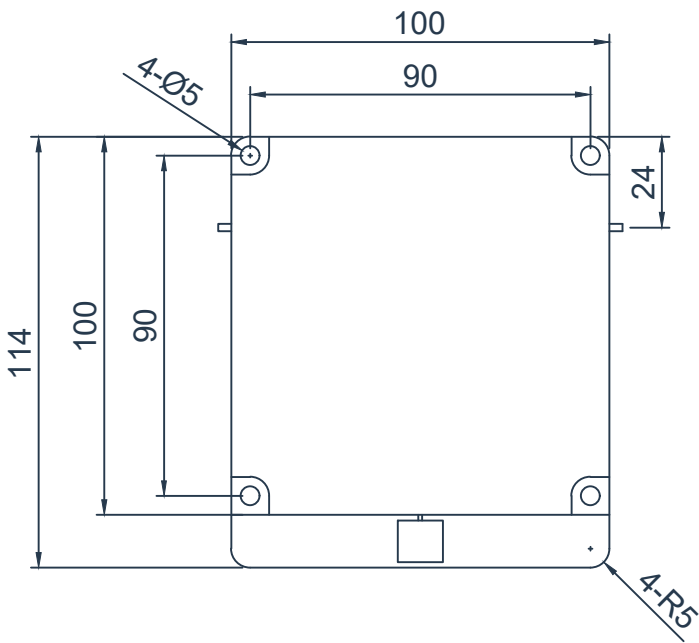

### SPECIFICATIONS

|                           |                   |
|---------------------------|-------------------|
| Part's Number             | HDITD50T200M-H    |
| Frequency(GHz)            | 0.05-0.2          |
| Direction                 | Counter Clockwise |
| Insertion Loss(dB)MAX     | 0.4               |
| Isolation(dB)MIN          | 20.0              |
| VSWR MAX                  | 1.2               |
| Phase equalization(±°)    | -                 |
| PK/CW (Watt)              | 5000/500          |
| Operating Temperature(°C) | -55~+85           |
| Reverse Power(Watt)       | -                 |
| Conector                  | TAB               |
| Base plate plating        | Nickel plating    |
| BW Max                    | 10%               |

Description:Drop In Isolator

Hzbeat Electronic Technology Co. Ltd



Unit:mm

1:2

A4