




1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

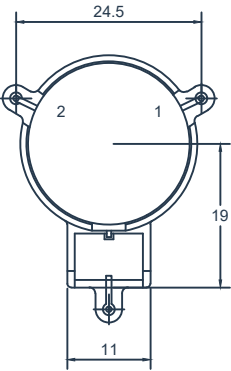

SPECIFICATIONS	
Part's Number	HDIE758T821M
Frequency(GHz)	0.758-0.821
Direction	Clockwise
Insertion Loss(dB)MAX	0.3(0.25)
Isolation(dB)MIN	23.0(24.0)
VSWR MAX	1.22(1.15/1.12)
Phase equalization(±°)	-
PK/CW (Watt)	2500/250
Operating Temperature(°C)	-40~+125
Reverse Power(Watt)	-
Conector	SMT
Base plate plating	Nickel plating
BW Max	FULL
Description:SMD Isolator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
1:1 A4	