


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0				

HzBeat

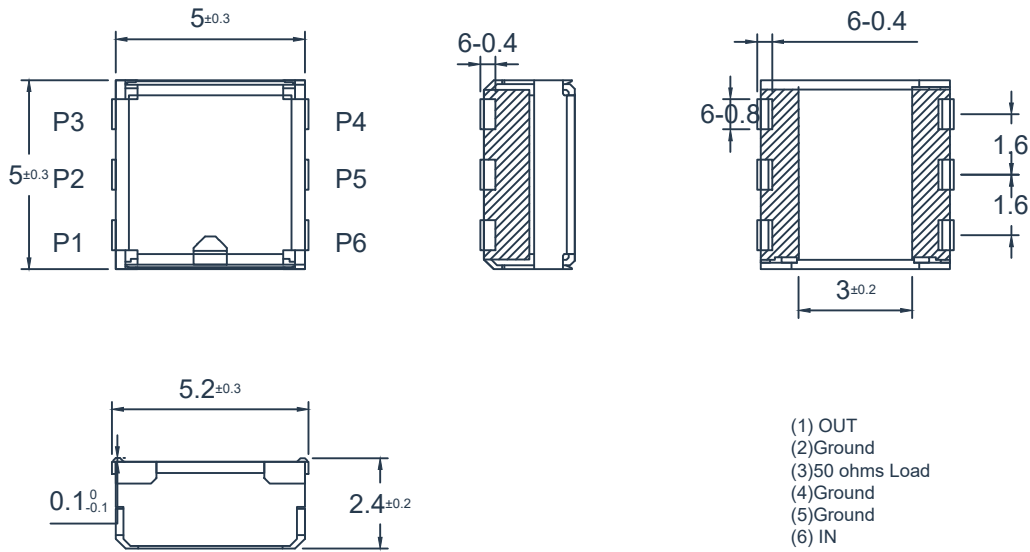

SPECIFICATIONS

Part's Number	HLIU1610T1626M
Frequency(GHz)	1.61-1.626
Insertion Loss(dB)MAX	0.6(-15~+35℃)
	0.65(-35~+85℃)
Isolation(dB)MIN	15.0(-15~+35℃)
	14.0(-35~+85℃)
VSWR MAX	1.40(-15~+35℃)
	1.50(-35~+85℃)
PK/CW (Watt)	10/2
Reverse Power (Max)	-
Operating Temperature(℃)	-40~+125
Conector	SMD
BW Max	FULL

Description:SMD Isolator

Hzbeat Electronic Technology Co. Ltd



Unit:mm

5:1

A4

Unless otherwise specified, the surface flatness is 3.2/