


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0				

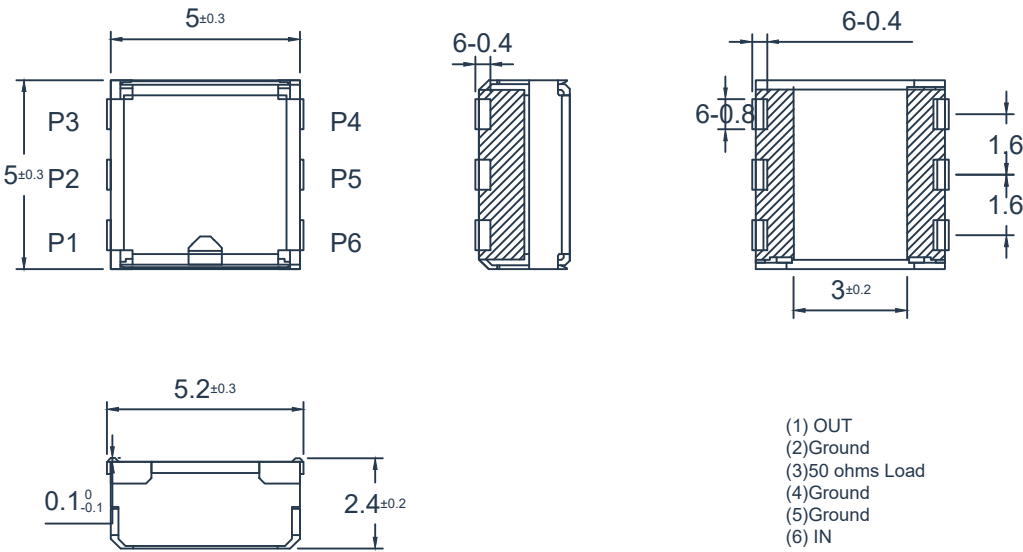

SPECIFICATIONS

Part's Number	HLIU2470T2730M
Frequency(GHz)	2.47-2.73
Insertion Loss(dB)MAX	0.85(-40~+105℃)
	0.95(+105~+125℃)
Isolation(dB)MIN	12.0(-40~+125℃)
VSWR MAX	1.67(-40~+125℃)
PK/CW (Watt)	10/2
Reverse Power (Max)	-
Operating Temperature(℃)	-40~+125
Conector	SMD
BW Max	FULL

Description:SMD Isolator

Hzbeat Electronic Technology Co. Ltd



Unit:mm

5:1

A4

Unless otherwise specified, the surface flatness is $3.2/\sqrt{}$