


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0				



SPECIFICATIONS	
Part's Number	HLIU3400T3800M
Frequency(GHz)	3.4-3.8
Insertion Loss(dB)MAX	1.0(-40~+85℃)
	1.2(+85~+125℃)
Isolation(dB)MIN	10.0(-40~+85℃)
	8.0(+85~+125℃)
VSWR MAX	1.92(-40~+85℃)
	2.30(+85~+125℃)
PK/CW (Watt)	10/2
Reverse Power (Max)	-
Operating Temperature(℃)	-40~+125
Conector	SMD
BW Max	FULL
Description:SMD Isolator	
Hzbeat Electronic Technology Co. Ltd	
5:1 A4	

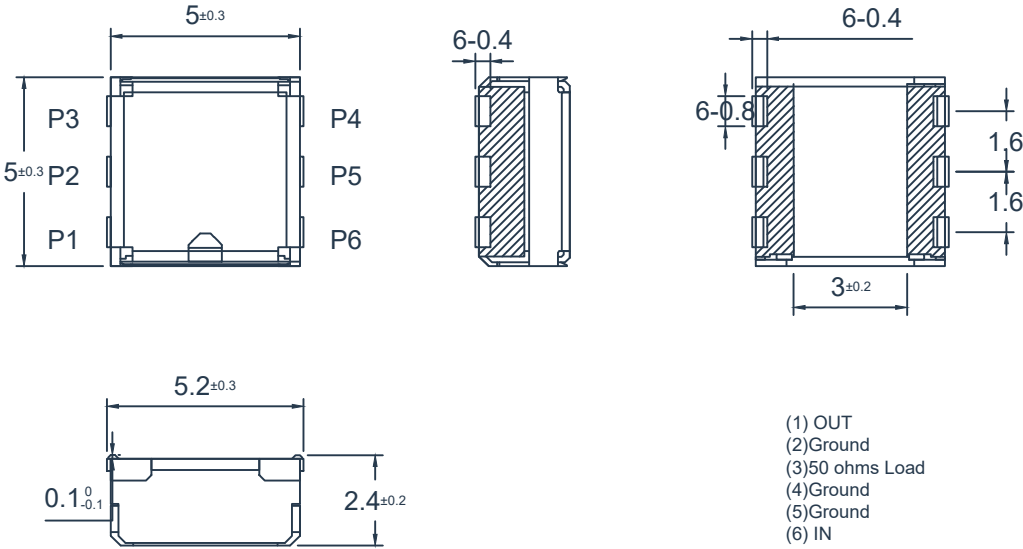

Unless otherwise specified, the surface flatness is $\nabla 3.2$