


1	2	3	4
Document No.	REV	DWG BY	CHK'D BY
	0		
		APPV'D BY	Date

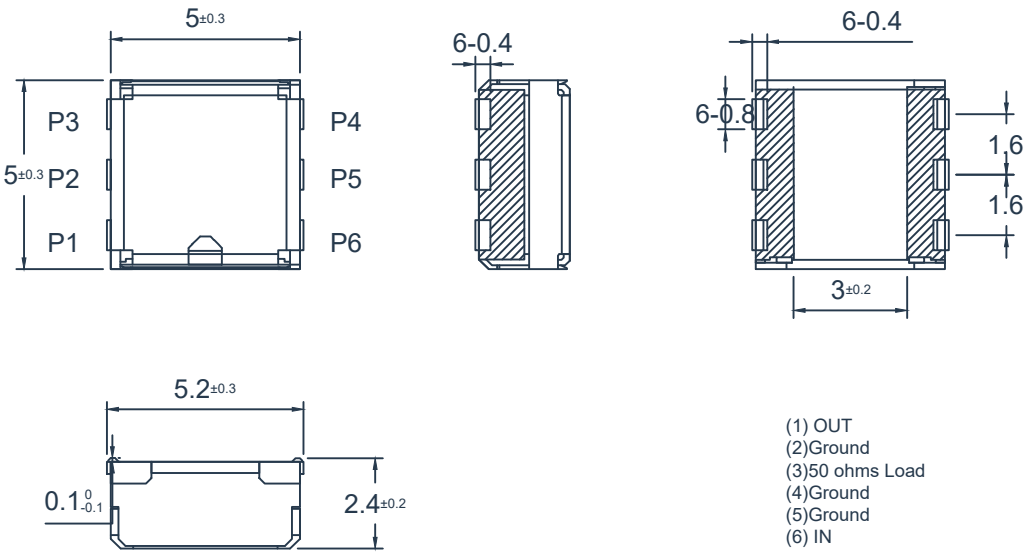

SPECIFICATIONS

Part's Number	HLIU925T960M
Frequency(GHz)	0.925-0.96
Insertion Loss(dB)MAX	0.7(-35~+85℃)
	0.9(+85~+115℃)
Isolation(dB)MIN	10.0(-40~+125℃)
VSWR MAX	1.92(-40~+125℃)
PK/CW (Watt)	10/2
Reverse Power (Max)	-
Operating Temperature(℃)	-40~+125
Conector	SMD
BW Max	FULL

Description:SMD Isolator

Hzbeat Electronic Technology Co. Ltd



Unit:mm

5:1

A4

Unless otherwise specified, the surface flatness is $\nabla 3.2$