
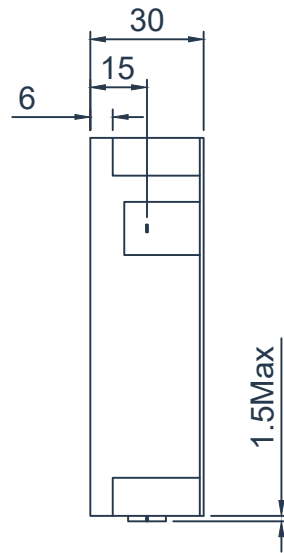


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

H_zBeat

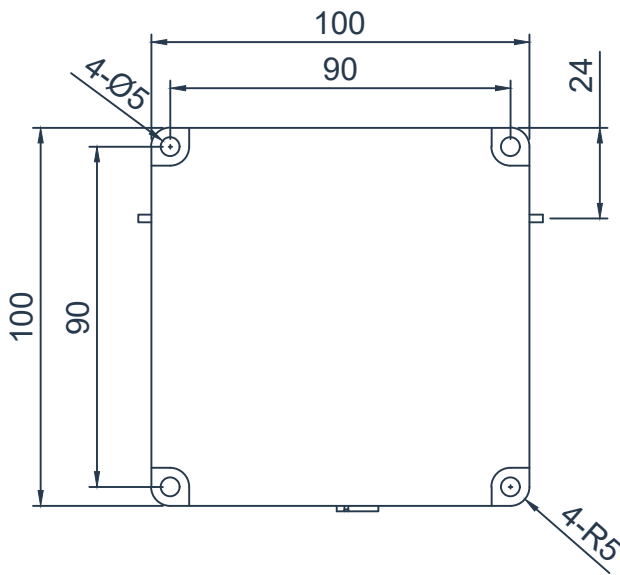

SPECIFICATIONS

Part's Number	HDITD50T300M
Frequency(GHz)	0.05-0.3
Direction	Counter Clockwise
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
VSWR MAX	1.20
Phase equalization(±°)	-
PK/CW (Watt)	1000/100
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	TAB
Base plate plating	Nickel plating
BW Max	10%

Description:Drop In Isolator

H_zbeat Electronic Technology Co. Ltd





Unit:mm

1:2

A4

1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

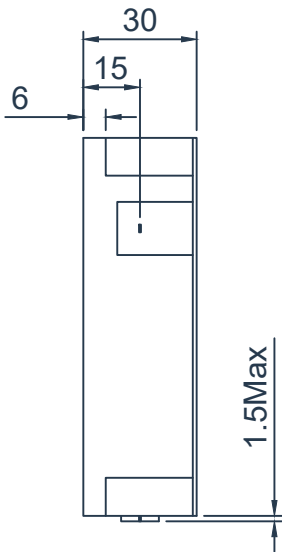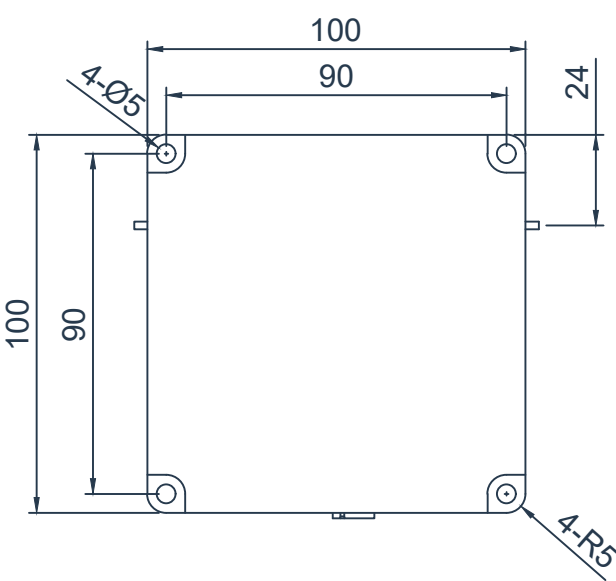

SPECIFICATIONS	
Part's Number	HDITD50T300M
Frequency(GHz)	0.05-0.3
Direction	Counter Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20.0
VSWR MAX	1.25
Phase equalization(±°)	-
PK/CW (Watt)	1000/100
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	TAB
Base plate plating	Nickel plating
BW Max	20%
Description:Drop In Isolator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
1:2 A4	