


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

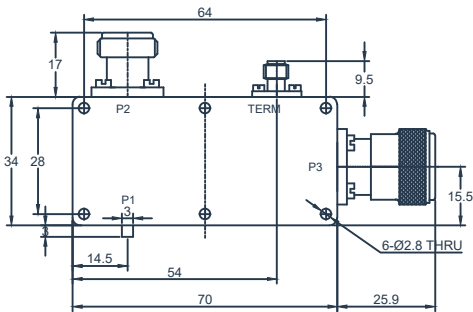

SPECIFICATIONS	
Part's Number	HCDUA29T34G-H
Frequency(GHz)	2.9-3.4
Direction	P1-P2/P2-P3
Insertion Loss(dB)MAX	P1-P2:0.3(0.4)
	P2-P3:0.6(0.8)
Isolation(dB)MIN	P2-P1:20.0(17.0)
	P3-P2:40.0(34.0)
VSWR MAX	1.25(1.35)
PK/PW/Duty cycle (Watt)	5000/500us/10%
Operating Temperature(°C)	-30~+95
Reverse Power(Watt)	-
Conector	N-K/N-J/SMA-K/SMA-J/TAB
BW MAX	FULL
Description:High Power Coaxial Dual-Junction Circulator	
Hzbeat Electronic Technology Co. Ltd	
 Unit:mm	1:2 A4