


|              |     |           |          |
|--------------|-----|-----------|----------|
| 1            | 2   | 3         | 4        |
| Document No. | REV | DWG BY    | CHK'D BY |
|              | 0   | Keith W   |          |
|              |     | APPV'D BY | Date     |
|              |     |           |          |

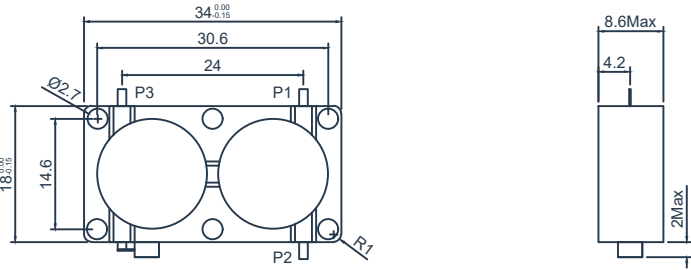

### SPECIFICATIONS

|                           |             |
|---------------------------|-------------|
| Part's Number             | HDDHB12T14G |
| Frequency(MHz)            | 1.2-1.4     |
| Direction                 | P1-P2/P2-P3 |
| Insertion Loss(dB)MAX     | 0.4(P1-P2)  |
|                           | 0.8(P2-P3)  |
| Isolation(dB)MIN          | 18.0(0.2)   |
|                           | 35.0(0.2)   |
| VSWR MAX                  | 1.35        |
| PK/CW (Watt)              | 200/50      |
| Operating Temperature(°C) | -40~+70     |
| Reverse Power(Watt)       | 20          |
| Conector                  | TAB         |
| BW Max                    | FULL        |

Description:SMD Circulator



1:1  
A4

