


1		2		3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date		
	0	Keith W					

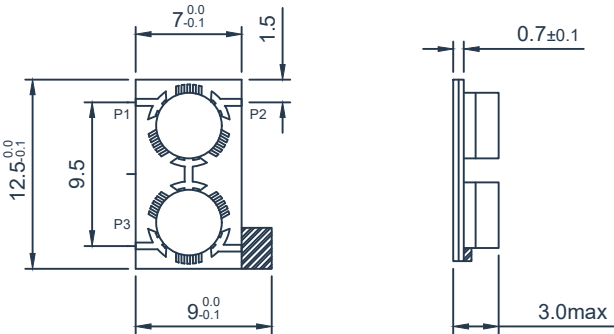

SPECIFICATIONS	
Part's Number	HMDHA50T60G-MR
Frequency(GHz)	5.0-6.0
Direction	P1-P2/P2-P3
Insertion Loss(dB)MAX	0.5(P1-P2) 1.0(P2-P3)
Isolation(dB)MIN	18.0(P2-P1) 30.0(P3-P2)
VSWR MAX	1.35
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	10
Conector	Gold wire bonding/Lap welding
Base plate plating	Gold Plating/Plate with silver
Description: Microstrip Dual-Junction Circulator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
2:1 A4	