


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0				

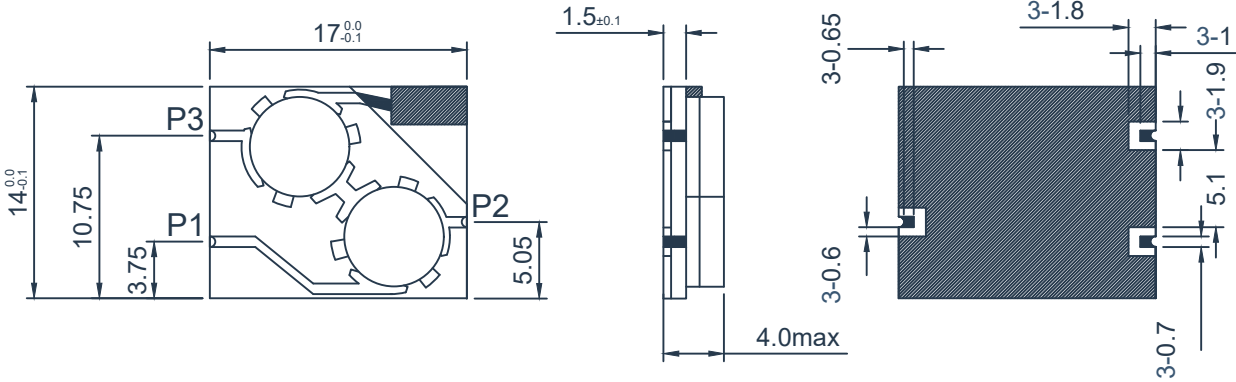

SPECIFICATIONS

Part's Number	HMDHB50T60G-R
Frequency(GHz)	5.0-6.0
Direction	P2-P1/P1-P3
Insertion Loss(dB)MAX	0.5(P1-P2)
	0.9(P2-P3)
Isolation(dB)MIN	18.0(P2-P1)
	30.0(P3-P2)
VSWR MAX	1.35
PK/CW (Watt)	30/15
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	10
Conector	Surface Mount Technology
Additional Notes	-

Description:SMT Microstrip Dual-Junction Circulator

Unless otherwise specified, the surface flatness is 3.2/



2:1

Unit:mm

A4