


1		2		3	4		5		6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date				
	0	Keith W							

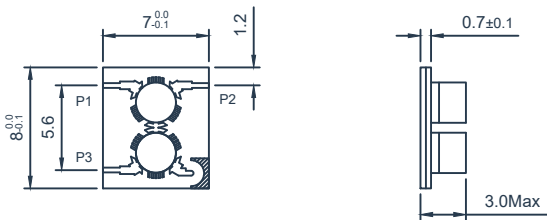

SPECIFICATIONS

Part's Number	HMDHA140T180G
Frequency(GHz)	14.0-18.0
Direction	P1-P2/P2-P3
Insertion Loss(dB)MAX	0.5(P1-P2) 0.9(P2-P3)
Isolation(dB)MIN	17.0(P2-P1) 28.0(P3-P2)
VSWR MAX	1.30
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	3
Conector	Gold wire bonding/Lap welding
Base plate plating	Gold Plating/Plate with silver

Description: Microstrip Dual-Junction Circulator

Hzbeat Electronic Technology Co. Ltd



2:1

Unit:mm

A4