


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

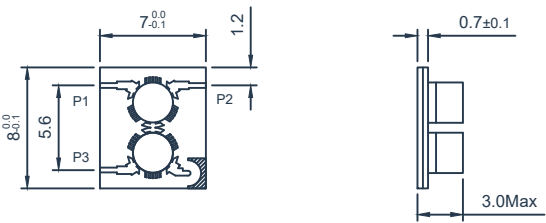

SPECIFICATIONS	
Part's Number	HMDHB140T180G
Frequency(GHz)	14.0-18.0
Direction	P2-P1/P1-P3
Insertion Loss(dB)MAX	0.5(P1-P2) 0.9(P2-P3)
Isolation(dB)MIN	17.0(P2-P1) 28.0(P3-P2)
VSWR MAX	1.30
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	3
Conector	Gold wire bonding/Lap welding
Base plate plating	Gold Plating/Plate with silver
Description: Microstrip Dual-Junction Circulator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
2:1 A4	