


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

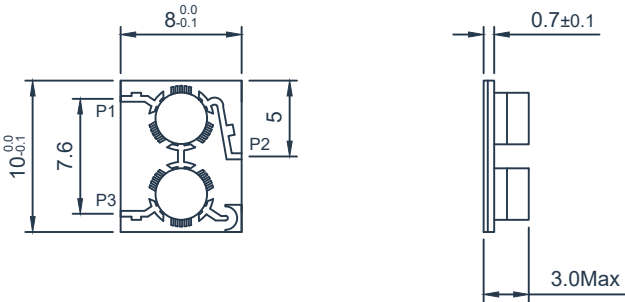

SPECIFICATIONS	
Part's Number	HMDYA80T120G
Frequency(GHz)	8.0-12.0
Direction	P1-P2/P2-P3
Insertion Loss(dB)MAX	0.65(P1-P2) 1.3(P2-P3)
Isolation(dB)MIN	16.0(P2-P1) 28.0(P3-P2)
VSWR MAX	1.35
PK/CW (Watt)	30/15
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	3
Conector	Gold wire bonding/Lap welding
Base plate plating	Gold Plating/Plate with silver
Description: Microstrip Dual-Junction Circulator	
Hzbeat Electronic Technology Co. Ltd	2:1
	Unit:mm A4