
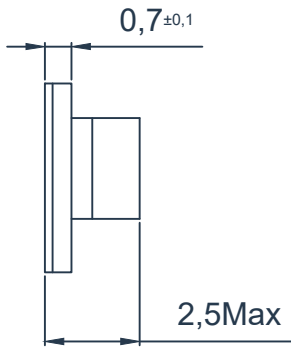


|              |     |         |          |           |      |
|--------------|-----|---------|----------|-----------|------|
| 1            | 2   | 3       | 4        | 5         | 6    |
| Document No. | REV | DWG BY  | CHK'D BY | APPV'D BY | Date |
| HD220528-21  | 0   | Keith W |          |           |      |

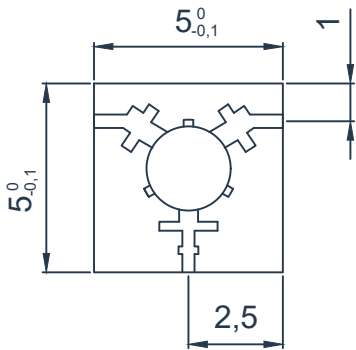

### SPECIFICATIONS

|                           |                                |
|---------------------------|--------------------------------|
| Part's Number             | HMCTA150T200G                  |
| Frequency(GHz)            | 15.0-20.0                      |
| Direction                 | Clockwise                      |
| Insertion Loss(dB)MAX     | 0.6                            |
| Isolation(dB)MIN          | 18                             |
| VSWR MAX                  | 1.30                           |
| Phase equalization(±°)    | -                              |
| PK/CW (Watt)              | 20/10                          |
| Operating Temperature(°C) | -55~+85                        |
| Reverse Power(Watt)       | -                              |
| Conector                  | Gold wire bonding/Lap welding  |
| Surface treatment         | Gold Plating/Plate with silver |
| Additional Notes          |                                |

Description:Microstrip Circulator

Hzbeat Electronic Technology Co. Ltd



Unit:mm

5:1

A4