

1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
HD220528-13	0	Keith W			

SPECIFICATIONS

Part's Number	HMCTA240T280G
Frequency(GHz)	24.0-28.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20
VSWR MAX	1.25
Phase equalization(±°)	-
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	Gold wire bonding/Lap welding
Surface treatment	Gold Plating/Plate with silver
Additional Notes	

Description:Microstrip Circulator

Hzbeat Electronic Technology Co. Ltd		5:1
	Unit:mm	A4


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
HD220528-13	0	Keith W			

SPECIFICATIONS

Part's Number	HMCTA240T280G
Frequency(GHz)	24.0-28.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20
VSWR MAX	1.25
Phase equalization(±°)	-
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	Gold wire bonding/Lap welding
Surface treatment	Gold Plating/Plate with silver
Additional Notes	

Description:Microstrip Circulator

Hzbeat Electronic Technology Co. Ltd		5:1
	Unit:mm	A4

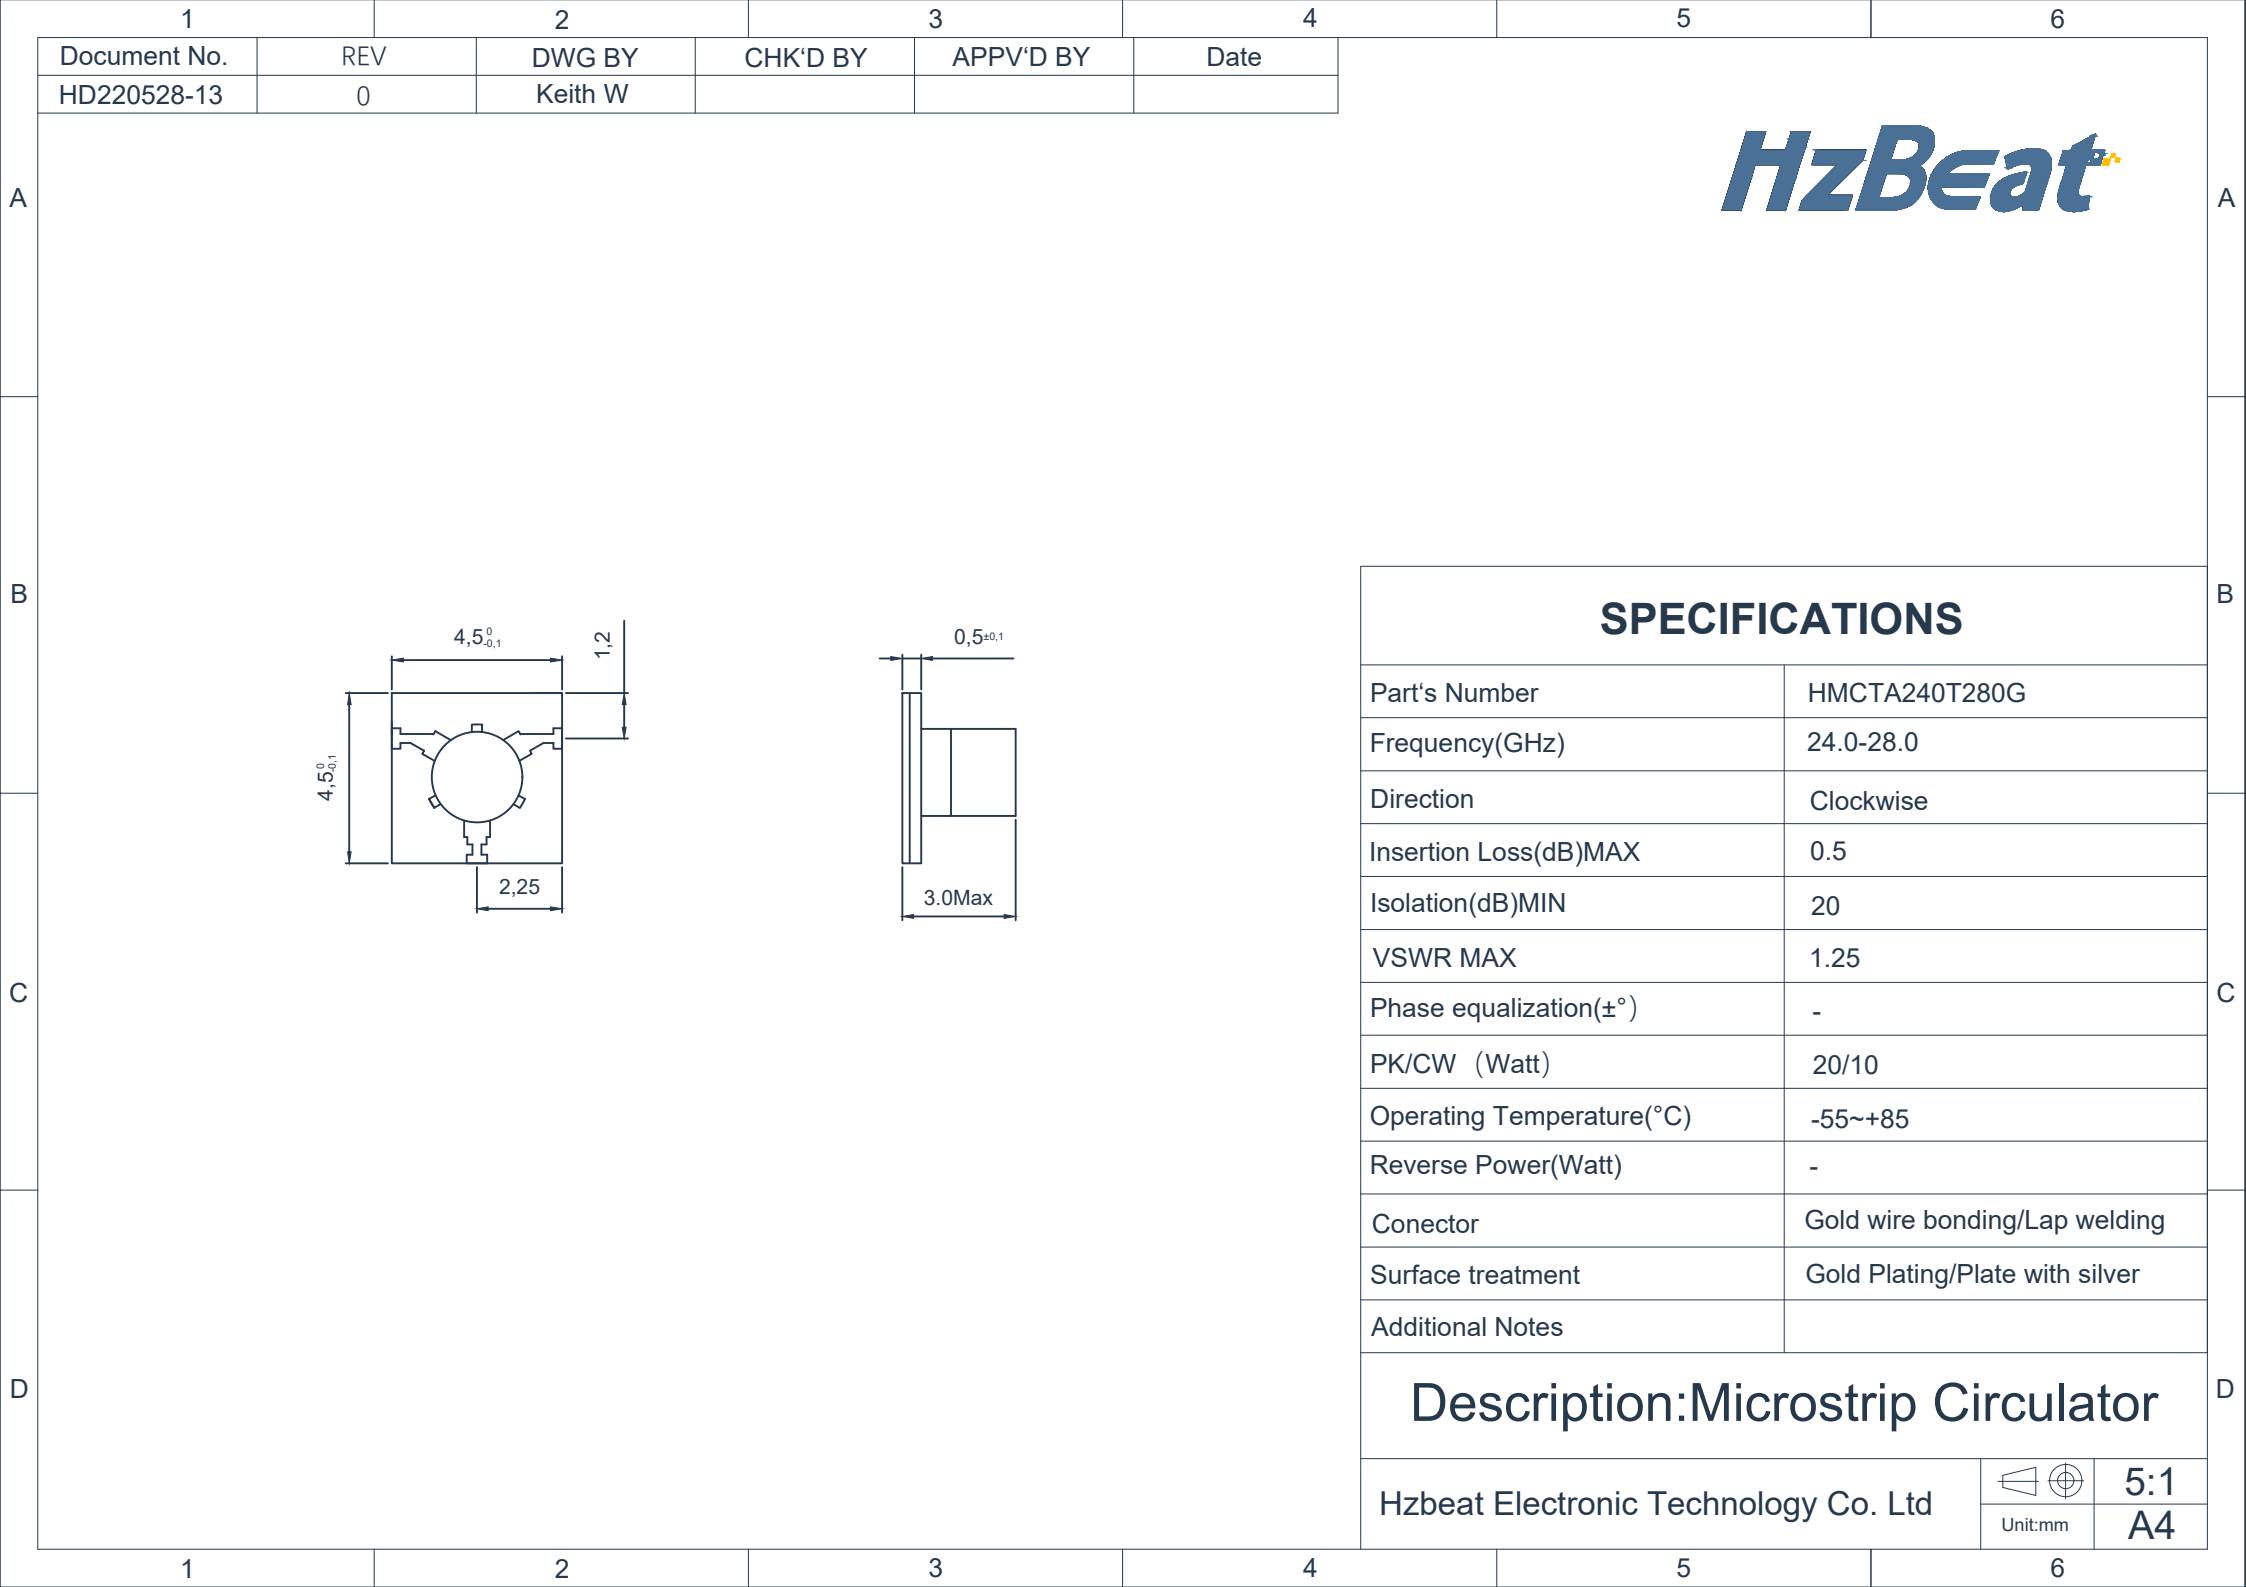

1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
HD220528-13	0	Keith W			

SPECIFICATIONS

Part's Number	HMCTA240T280G
Frequency(GHz)	24.0-28.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20
VSWR MAX	1.25
Phase equalization(±°)	-
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	Gold wire bonding/Lap welding
Surface treatment	Gold Plating/Plate with silver
Additional Notes	

Description:Microstrip Circulator

Hzbeat Electronic Technology Co. Ltd		5:1
	Unit:mm	A4

1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
HD220528-13	0	Keith W			

SPECIFICATIONS

Part's Number	HMCTA240T280G
Frequency(GHz)	24.0-28.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20
VSWR MAX	1.25
Phase equalization(±°)	-
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	Gold wire bonding/Lap welding
Surface treatment	Gold Plating/Plate with silver
Additional Notes	

Description:Microstrip Circulator

Hzbeat Electronic Technology Co. Ltd		5:1
	Unit:mm	A4

1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
HD220528-13	0	Keith W			

SPECIFICATIONS

Part's Number	HMCTA240T280G
Frequency(GHz)	24.0-28.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20
VSWR MAX	1.25
Phase equalization(±°)	-
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	Gold wire bonding/Lap welding
Surface treatment	Gold Plating/Plate with silver
Additional Notes	

Description:Microstrip Circulator

Hzbeat Electronic Technology Co. Ltd		5:1
	Unit:mm	A4

1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
HD220528-13	0	Keith W			

SPECIFICATIONS

Part's Number	HMCTA240T280G
Frequency(GHz)	24.0-28.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20
VSWR MAX	1.25
Phase equalization(±°)	-
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	-
Conector	Gold wire bonding/Lap welding
Surface treatment	Gold Plating/Plate with silver
Additional Notes	

Description:Microstrip Circulator

Hzbeat Electronic Technology Co. Ltd		5:1
	Unit:mm	A4