


1		2		3		4		5		6	
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY		Date					
HD220526-3	0	Keith W									

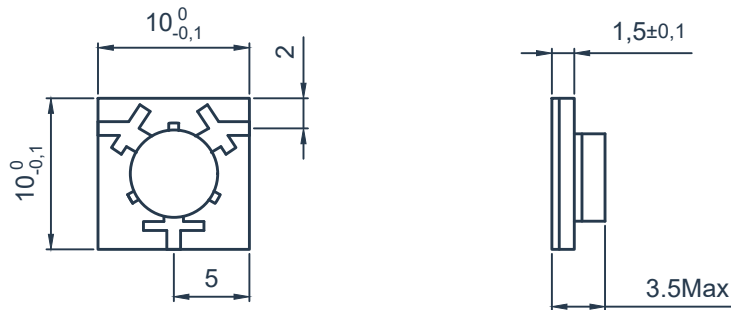

SPECIFICATIONS

Part's Number	HMCTA48T54G
Frequency(GHz)	4.8-5.4
Direction	Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20.0
VSWR MAX	1.25
Phase equalization($\pm^\circ$)	-
PK/CW (Watt)	20/10
Operating Temperature($^\circ\text{C}$)	-55~+85
Reverse Power(Watt)	-
Conector	Gold wire bonding/Lap welding
Surface treatment	Gold Plating/Plate with silver
Additional Notes	

Description:Microstrip Circulator

Hzbeat Electronic Technology Co. Ltd		2:1
	Unit:mm	A4