


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
HD220723-1	0	Keith W			07.23.2022

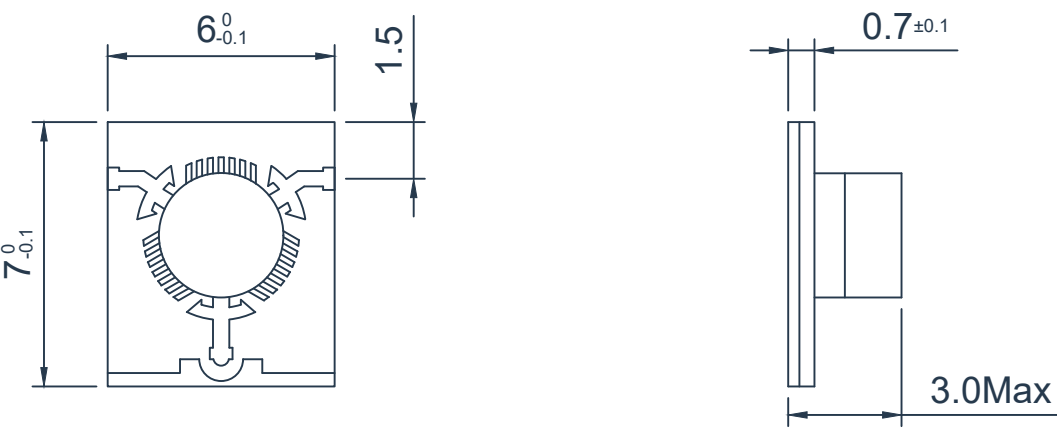

SPECIFICATIONS	
Part's Number	HMITA100T120G
Frequency(GHz)	10.0-12.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20
VSWR MAX	1.25
Phase equalization(±°)	-
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	3
Conector	Gold wire bonding/Lap welding
Surface treatment	Gold Plating/Plate with silver
Additional Notes	
Description:Microstrip Isolator	
Hzbeat Electronic Technology Co. Ltd	
	Unit:mm
5:1 A4	

Unless otherwise specified, the surface flatness is 3.2/

1	2	3	4	5	6
---	---	---	---	---	---