


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
HD220723-1	0	Keith W			07.23.2022

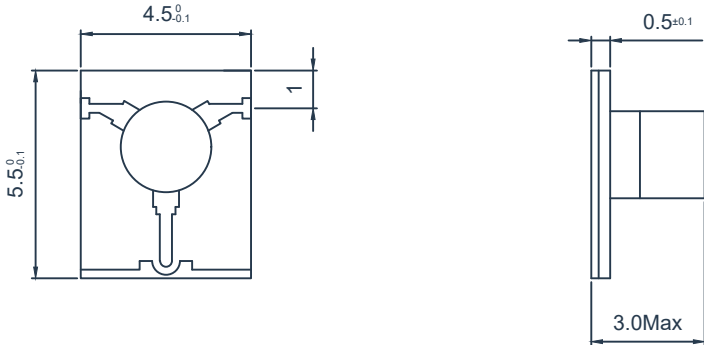

Unless otherwise specified, the surface flatness is $\nabla_{3.2}$

SPECIFICATIONS	
Part's Number	HMITA180T220G
Frequency(GHz)	18.0-22.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20
VSWR MAX	1.25
Phase equalization(±°)	-
PK/CW (Watt)	15/5
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	2
Conector	Gold wire bonding/Lap welding
Surface treatment	Gold Plating/Plate with silver
Additional Notes	
Description:Microstrip Isolator	
Hzbeat Electronic Technology Co. Ltd	5:1
	Unit:mm A4