


|              |     |         |          |           |      |
|--------------|-----|---------|----------|-----------|------|
| 1            | 2   | 3       | 4        | 5         | 6    |
| Document No. | REV | DWG BY  | CHK'D BY | APPV'D BY | Date |
| HD220530-7   | 0   | Keith W |          |           |      |

HzBeat

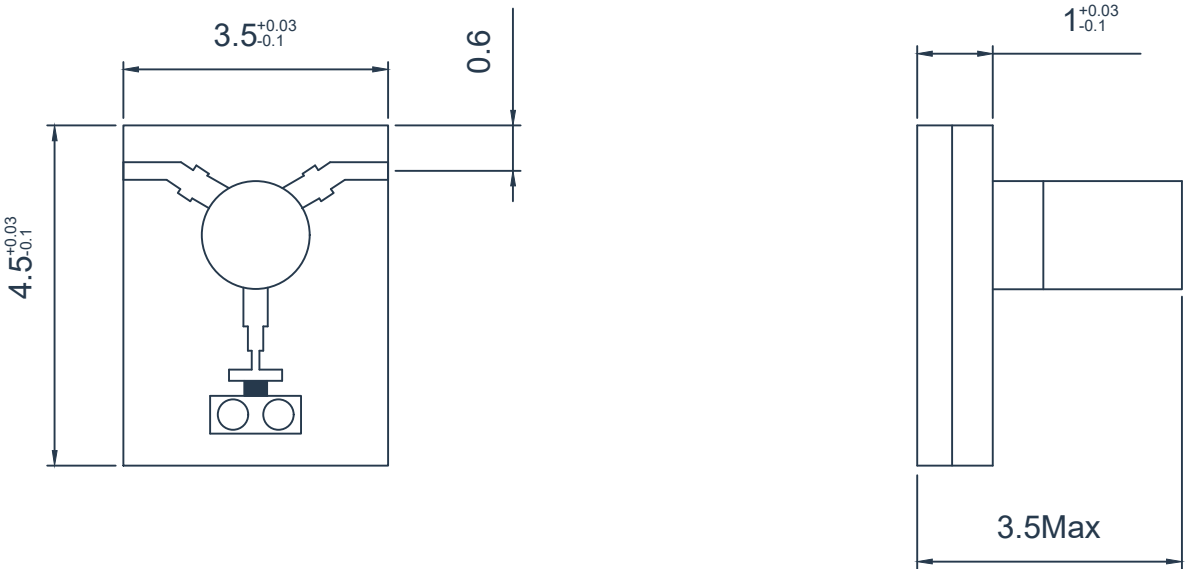

| SPECIFICATIONS                       |                   |
|--------------------------------------|-------------------|
| Part's Number                        | HMITA320T380G     |
| Frequency(GHz)                       | 32.0-38.0         |
| Direction                            | Clockwise         |
| Insertion Loss(dB)MAX                | 0.8               |
| Isolation(dB)MIN                     | 17                |
| VSWR MAX                             | 1.40              |
| Phase equalization(±°)               | -                 |
| PK/CW (Watt)                         | 5/2               |
| Operating Temperature(°C)            | -55~+85           |
| Reverse Power(Watt)                  | 1                 |
| Conector                             | Gold wire bonding |
| Surface treatment                    | Gold Plating      |
| Additional Notes                     |                   |
| Description:Microstrip Circulator    |                   |
| Hzbeat Electronic Technology Co. Ltd |                   |
| Unit:mm                              |                   |
| 10:1<br>A4                           |                   |