


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
HD220723-1	0	Keith W			07.23.2022

HzBeat

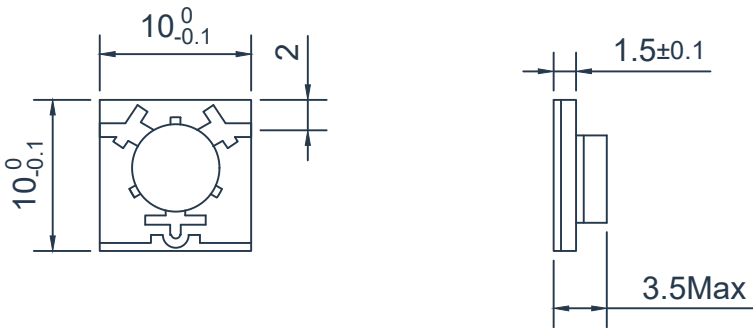

SPECIFICATIONS	
Part's Number	HMITA50T80G
Frequency(GHz)	5.0-8.0
Direction	Clockwise
Insertion Loss(dB)MAX	0.6
Isolation(dB)MIN	18.0
VSWR MAX	1.30
Phase equalization(±°)	-
PK/CW (Watt)	20/10
Operating Temperature(°C)	-55~+85
Reverse Power(Watt)	5
Conector	Gold wire bonding/Lap welding
Base plate plating	Gold Plating/Plate with silver
Additional Notes	
Description:Microstrip Isolator	
Hzbeat Electronic Technology Co. Ltd	
Unit:mm	
2:1 A4	

Unless otherwise specified, the surface flatness is 3.2/