


1	2	3	4	5	6
Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
HD220725-1	0	Keith W			07.25.2022

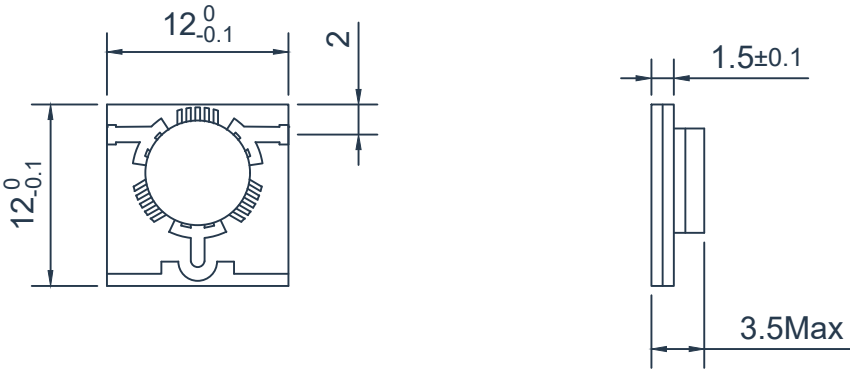

SPECIFICATIONS		
Part's Number	HMITB34T45G	
Frequency(GHz)	3.5-4.5	
Direction	Counter Clockwise	
Insertion Loss(dB)MAX	0.6	
Isolation(dB)MIN	18.0	
VSWR MAX	1.30	
Phase equalization(±°)	-	
PK/CW (Watt)	20/10	
Operating Temperature(°C)	-55~+85	
Reverse Power(Watt)	5	
Conector	Gold wire bonding/Lap welding	
Base plate plating	Gold Plating/Plate with silver	
Additional Notes		
Description:Microstrip Isolator		
Hzbeat Electronic Technology Co. Ltd		2:1
	Unit:mm	A4

Unless otherwise specified, the surface flatness is $\sqrt{3.2}$