Document No.	REV	DWG BY	CHK'D BY	APPV'D BY	Date
	0	Keith W			

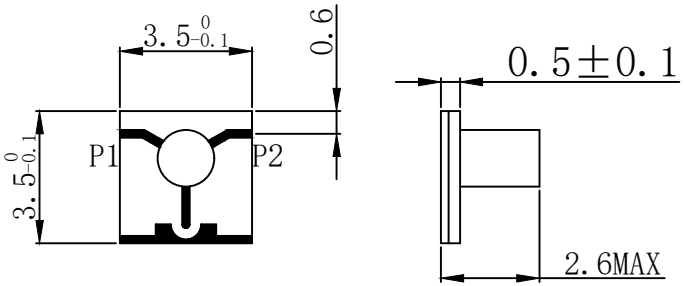

SPECIFICATIONS

Part's Number	HMITA320T400G
Frequency(GHz)	32-40
Direction	Clockwise
Insertion Loss(dB)MAX	1.0
Isolation(dB)MIN	14
VSWR MAX	1.40
Phase equalization(±°)	-
CW （Watt）	4
Operating Temperature(°C)	-55~+85
Reverse Power（Watt)	2
Conector	Gold wire bonding/Lap welding
Surface treatment	Gold Plating/Plate with silver
Additional Notes	

Description:Microstrip Circulator

Hzbeat Electronic Technology Co. Ltd

Unit:mm

5:1

A4