




|              |     |         |          |           |      |
|--------------|-----|---------|----------|-----------|------|
| 1            | 2   | 3       | 4        | 5         | 6    |
| Document No. | REV | DWG BY  | CHK'D BY | APPV'D BY | Date |
|              | 0   | Keith W |          |           |      |

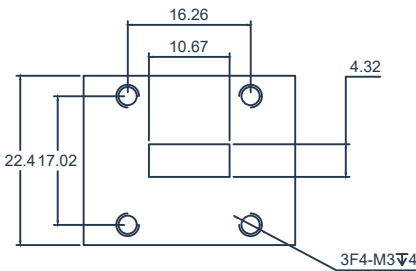

SPECIFICATIONS

|                           |                              |
|---------------------------|------------------------------|
| Part's Number             | HWCT180T265G                 |
| Frequency(GHz)            | 18.0-26.5                    |
| Direction                 | -                            |
| Insertion Loss(dB)MAX     | 0.3                          |
| Isolation(dB)MIN          | 20.0                         |
| VSWR MAX                  | 1.2                          |
| Phase equalization(±°)    | -                            |
| PK/CW (Watt)              | -/200                        |
| Operating Temperature(°C) | -55~+85                      |
| Reverse Power(Watt)       | -                            |
| Conector                  | WR-42                        |
| Base plate plating        | Aluminum Oxidation treatment |
| BW Max                    | FULL                         |

Description:Waveguide Circulator

Hzbeat Electronic Technology Co. Ltd



Unit:mm

1:1

A4